

## Flowcoat TL (0.5 mm)



### Description

High performance, solvent free, chemical resistant, epoxy resin coating. Improved slip resistance can be achieved by inclusion of quartz aggregate between coats.

### Uses

Flowcoat TL may be used for the more demanding surfaces such as required in dry environments in the light engineering & pharmaceutical industries, for corridors, locker rooms, culverts and warehousing etc.

### Benefits

- Chemical resistant
- Hard wearing
- Abrasion resistant
- Solvent free, low odour
- Aesthetically attractive – brightens up dull factories and warehouses
- Seamless and hygienic finish
- Low maintenance
- Slip resistant finish can be tailored to specific client requirements

### Project References

Securitas in Malmö, Halmstad airport;  
Ortvikens pappersbruk in Sundsvall (Pulp&paper),  
Felix Sandvik in Sandviken

### Standard colour chart



Goosewing Grey 222



Beige 326



Mid Grey 280



Emerald Green 740



Yellow Grey 217



Yellow 340




Tile Red 637



Sky Blue 452

The applied colours may differ slightly from the examples shown above.  
Contact our customer services for a true colour sample or a special colour match.

### System Design

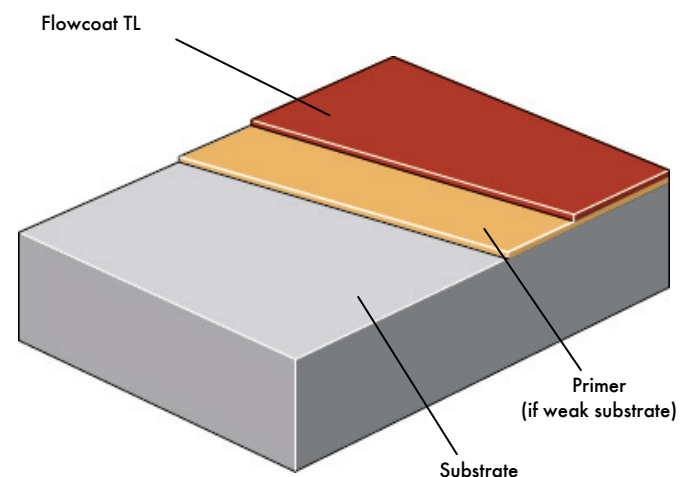

## Model Specification

Product: Flowcoat TL

Finish: Gloss

Thickness: 0.5 mm

Colour: \_\_\_\_\_

Preparatory work and application in accordance with suppliers instructions.

Supplier: Flowcrete UK Ltd

Telephone : Customer Service - +44 (0) 1270 753000

## Substrate Requirements

Concrete or screed substrate should be a minimum of 25N/mm<sup>2</sup>, free from laitance, dust and other contamination. The substrate should be dry to 75% RH as per BS8204 and free from rising damp and ground water pressure. If no damp proof membrane is present Hydraseal DPM can be incorporated directly beneath the Flowcoat system.

## Products Included in this System

Primer (if weak substrate) : Flowprime @ 0.25 kg/m<sup>2</sup>

Coating: Flowcoat TL (density 1.33 kg/l)

1<sup>st</sup> Coat @ 0.3 kg/m<sup>2</sup>

2<sup>nd</sup> Coat @ 0.3 kg/m<sup>2</sup>

Coverage rates will vary with surface profile and temperature. Non-slip finishes: Various grades of quartz can be incorporated to provide a textured surface.

Detailed application instructions are available upon request.

## Installation Service

The installation should be carried out by a Flowcrete approved contractor with a documented quality assurance scheme.

Obtain details of our approved contractors by contacting our customer service team or enquiring via our web site [www.flowcrete.com](http://www.flowcrete.com)

## Environmental considerations

The finished system is assessed as non-hazardous to health and the environment. The long service life and seamless surface reduce the need for repairs, maintenance and cleaning. Environmental and health considerations are controlled during manufacture and application of the products by Flowcrete staff and fully trained and experienced contractors.

## Focus on the Floorzone

Flowcrete Group plc are world leaders in specialist industrial and commercial flooring. Systems available include: underfloor heating systems, floor screeds, surface damp proof membranes, decorative floor finishes, seamless terrazzo, car park deck waterproofing, corrosion resistant systems... to name just a few. Our objective is to satisfy your Floorzone needs.

## Flooring Design Service

Special corporate colours and designs can be produced to special order.

## System Performance Guide

Complies with BS 8204-6/FeRFA type 3.

## Technical Information

The figures that follow are typical properties achieved in laboratory tests at 20 °C and at 50% Relative Humidity.

Fire Resistance	BS476:Part 7: Surface spread of flame: Class 1 (Indicative)
Slip Resistance	TRRL Pendulum Slip Test Dry 60 Wet 36 Dry 68 Wet 57 (with aggregate)
Thermal Resistance	Tolerant up to 70 °C
Water Permeability	Nil - Karsten test (impermeable)
Surface Hardness	180 secs. Koenig Hardness Test
Chemical Resistance	Go to <a href="http://www.flowcrete.com">www.flowcrete.com</a>
Abrasion Resistance	Taber Abrader: 5 mg loss per 1000 cycles (1 kg load using CS17 wheels) BS8204-2 Grade AR2
Compressive Strength	> 80 N/mm <sup>2</sup> (BS6319)
Flexural Strength	> 60 N/mm <sup>2</sup> (BS6319)
Tensile Strength	> 15 N/mm <sup>2</sup> (BS6319)
Bond Strength	Greater than cohesive strength of 25 N/mm <sup>2</sup> concrete. >1.5 MPa.

## Speed of Cure

	10°C	20°C	30°C
Light traffic	48 hrs	15 hrs	12 hrs
Full traffic	72 hrs	48 hrs	40 hrs
Full chemical cure	12 days	5 - 7 days	5 - 7 days

## Aftercare - Cleaning and Maintenance

Clean regularly using a single or double headed rotary scrubber drier in conjunction with a mildly alkaline detergent.

## Life Expectancy

4 years, subject to correct maintenance regime.

## Important Note

Flowcrete's products are guaranteed against defective materials and manufacture and are sold subject to its standard Terms and Conditions of Sale, copies of which can be obtained on request.

## Further Information

To ensure you are specifying a fit for purpose flooring for your project please consult our Technical Advisors on the number below or visit our website to register your interest in specifying one of the most durable floors on the market.